



BRUKSANVISNING
INSTRUCTION MANUAL
LED STRIP ARBEIDSBELYSNING
25m 3000K

8,6W/m IP44 230V

J&EL



IP44   




Spenning: 230V
Effekt: 8,6W/m
Lumen: 930lm/m
IP: IP44
Ra: 80
Kelvin: 3000K
Lys spredning: 120°
Dimbar: Ja
Levetid: 20.000T


Voltage: 230V
Power: 8.6W/m
Lumen: 930lm/m
IP: IP44
Ra: 80
Kelvin: 3000K
Beam angle: 120°
Dimmable: Ja
Lifetime: 20,000T

FORLENGELSE / EXTENSION


Strip A




Strip B



Strip A Strip B




Strip A + Strip B



*** Maksimum lengde 50m.
Maximum length 50m.**

MÅL / MEASUREMENT

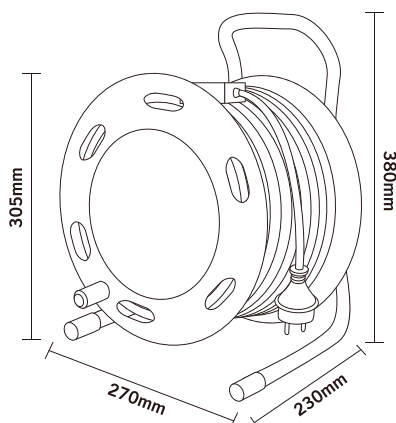

ADVARSEL!

Ta hele LED stripen av trommelen før den tilkobles strøm.
Ikke beregnet for kontinuerlig bruk over 24 timer.

ATTENTION!

Remove the entire LED strip from the drum before connecting it to the power.
Not recommend for consistently using over 24hours.